


TEKNOPANEL PRESENTS: PUR / PIR INSULATED DEEP LINED SANDWICH WALL PANELS

- /// Architectural appearance with deep lined surface pattern
- /// Option for external and hidden screw connection details
- /// Suitable for both horizontally and vertically installation
- /// Produced in PUR or PIR insulation types



+90 850 777 0850
teknopanel.com



teknopanel®

Architectural Buildings with Teknopanel Deep Lined Sandwich Wall Panels


Teknopanel PUR/PIR Insulated Deep Lined Sandwich Wall Panels wrap your building with its deep lined surface pattern and offer solutions for aesthetic and modern-looking structures that designers and investors require.

PUR/PIR Insulated Deep Lined Wall Panels, which create energy efficient, comfortable and safe environments, can be produced in any length between 2 and 12 meters and in thicknesses ranging from 50 mm to 200 mm. It can be installed horizontally and vertically with both standard and hidden screw connection detail options, and can be combined with other Teknopanel lined and micro lined wall panels.








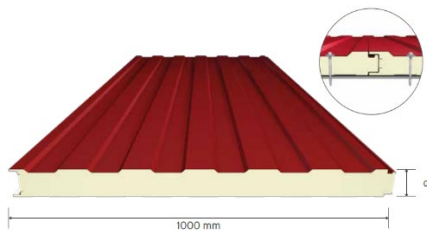



Deep Lined Sandwich Wall Panels, produced in accordance with international standards, become a part of the architectural design with a wide range of colors. It provides insulation for thermal, moisture, and sound as required by your project, while enhancing fire resistance.

Deep Lined Sandwich Wall Panels;

PUR/PIR Insulated Standard Deep Lined Wall Panel WP-SD / WI-SD




Product Features







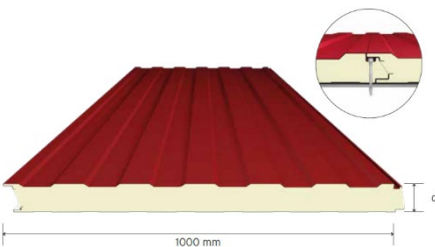




Core Material	PUR - PIR
Fire Performance	B-s2; d0 - B-s1; d0
Core Thickness = d (mm)	50 60 70 75 80 100 120 150 180 200
Distributed Load* (kg/m²)	222 271 320 345 370 471 574 732 892 999
Outer Sheet Thickness (mm)	0,45 - 0,50 - 0,60 - 0,70
Inner Sheet Thickness (mm)	0,35 - 0,40 - 0,45 - 0,50 - 0,60 - 0,70
Place of Production	Izmir
Certificates	     
Usage Areas	    

*Uniformly distributed load values calculated according to 0,50 mm outer sheet, 0,40 mm inner sheet and 2,00 m multi span.
**Certificate is valid for PIR insulated panels.

PUR/PIR Insulated Secret Fix Deep Lined Wall Panel WP-HD / WI-HD



Product Features

Core Material	PUR - PIR
Fire Performance	B-s2; d0 - B-s1; d0
Core Thickness = d (mm)	50 60 70 75 80 100 120 150 180 200
Distributed Load* (kg/m²)	242 294 348 375 402 512 624 795 969 1086
Outer Sheet Thickness (mm)	0,45 - 0,50 - 0,60 - 0,70
Inner Sheet Thickness (mm)	0,35 - 0,40 - 0,45 - 0,50 - 0,60 - 0,70
Place of Production	Izmir
Certificates	     
Usage Areas	    

* Uniformly distributed load values calculated according to 0,50 mm outer sheet, 0,40 mm inner sheet and 2,00 m multi span.
**Certificate is valid for PIR insulated panels.